

OPTIONS

BATTERY PACK AND CASE

BP-290
Rechargeable Li-ion battery with intelligent reporting. 1910 mAh (min.) 2010 mAh (typ.). IP67 Waterproof

BP-291
Battery case LR6 (AA) x 5. IP54 Water resistance

MULTI-CHARGER

AD-132N

BC-214 **BC-157S**

Charges up to six BP-290 batteries in 2.8 hours (approx.). AD-132N is supplied with BC-214, depending on version.

CONNECTABLE TYPE CHARGER

BC-226 **BC-228**

Charges the BP-290 in 2.7 hours. (approx.) Connects up to six BC-226 units.

INTELLIGENT CHARGER

BC-225 **BC-123S***

Shows the charging information with LED lighting. Charges the BP-290 in 2.5 hours. (approx.)

DESKTOP CHARGERS

BC-227 **BC-123S*** **BC-219N** **BC-123S***

Charges the BP-290 in 2.7 hours. (approx.) Charges the BP-290 in 2.5 hours. (approx.)

* SE for Europe plug. SUK for UK plug. SV for Australia plug.

BELT CLIPS

MBB-3 **MB-136**

Alligator type. Swivel type.

BELT HANGERS

MB-96N **MB-96F** **MB-96FL**

Swivel type. Fixed type. Long type.

ACC ADAPTOR

AD-118

14-pin multi-connector to 6-pin Hirose connector

CARRYING CASES

LC-187 **LC-188**

Hard type. Hard type. Charging is possible while the case is attached.

CIGARETTE LIGHTER CABLE & POWER SUPPLY CABLES

CP-23L **OPC-515L** **OPC-656**

For use with the BC-219N or BC-227. For use with the BC-219N, BC-225 or BC-227. For use with the BC-214.

ANTENNA

FA-SC58V

SOFTWARE

• **RS-BC225** : Intelligent charger software for Windows® PC. For use with BC-225.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. AQUAQUAKE is a trademark of Icom Incorporated. Windows is either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries. All other trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 www.icom.co.jp/world Count on us!

Icom America Inc.
12421 Willows Road NE, Kirkland, WA 98034, U.S.A.
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: <http://www.icomamerica.com>

Icom (Europe) GmbH
Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone: +49 (6196) 76685-0
Fax: +49 (6196) 76685-50
E-mail: info@icomeurope.com
URL: <http://www.icomeurope.com>

Icom France s.a.s.
Zac de la Plaine,
1 Rue Brindejonc des Moulinas, BP 45804,
31505 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: <http://www.icom-france.com>

Icom Canada
Glenwood Centre #150-6165
Highway 17A, Delta, B.C.,
V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: <http://www.icomcanada.com>

Icom Spain S.L.
Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: <http://www.icomspain.com>

Icom (Australia) Pty. Ltd.
Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: <http://www.icom.net.au>

Icom Brazil
Rua Itororó, 444 Padre Eustáquio
Belo Horizonte MG,
CEP: 30720-450, Brazil
Phone: +55 (31) 3582 8847
Fax: +55 (31) 3582 8987
E-mail: sales@icombrazil.com

Icom (UK) Ltd.
Blacksloe House, Altra Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone: +44 (0) 1227 741741
Fax: +44 (0) 1227 741742
E-mail: info@icomuk.co.uk
URL: <http://www.icomuk.co.uk>

SPECIFICATIONS

IC-M85E		
GENERAL	Marine channels	PMR channels
Frequency coverage Tx Rx	156.000–161.450 MHz 156.000–163.425 MHz	136.000–174.000 MHz
Usable channel groups, Number of channels	INT, USA* channels (*Varies according to version)	100 PMR channels
Type of emissions	EUR, UK FRG 16K0G3E	16K0F3E/8K50F3E 14K0F3E/8K50F3E
Channel spacing	EUR, UK FRG 25 kHz	25/12.5 kHz 20/12.5 kHz
Power supply requirement	7.2 V DC nominal	
Current drain (approximate)		
Tx (at 5 W)	1.5 A	
Rx Max. audio	0.45 A	
Antenna impedance	50 Ω	
Operating temperature range	-15 °C to +55 °C	-25 °C to +55 °C
Dimensions (W×H×D) (Projections not included)	56 × 92 × 29 mm (With BP-290)	
Weight (approximate)	246 g (with BP-290, FA-SC58V and MBB-3)	
TRANSMITTER		
Output power (at 7.2 V DC)	5/3/1 W	5/3/1 W
Max. frequency deviation	EUR, UK FRG ±5.0 kHz	±5.0 kHz (Wide) ±2.5 kHz (Narrow) ±4.0 kHz (Wide) ±2.5 kHz (Narrow)
Frequency stability	±1.5 kHz	
Spurious emissions	0.25 μW (≤2 GHz), 1.0 μW (>2 GHz)	
Residual modulation	40 dB	40 dB (Wide) 34 dB (Narrow)
Audio harmonic distortion	10% (at 60% deviation)	
Modulation limiting	60–100% of maximum deviation	
RECEIVER		
Sensitivity (at 20 dB SINAD)	-4 dBμ emf typical	-4 dBμ emf typical (Wide) -2 dBμ emf typical (Narrow)
Adjacent channel selectivity	70 dB	70 dB (Wide) 60 dB (Narrow)
Spurious response	70 dB	
Intermodulation	68 dB	65 dB
Hum and noise	40 dB	40 dB (Wide), 34 dB (Narrow)
Audio output power	Internal SP 700 mW typical (at 10% distortion with 12 Ω load at 1 kHz) External SP 700 mW typical (at 10% distortion with 8 Ω load at 1 kHz)	


Measurements made in accordance with EN 301-178 or EN 300 086.
All stated specifications are subject to change without notice or obligation.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810 G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I-C
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	II
Salt Fog	509.5	-
Dust Blowing	510.5	I
Immersion	512.5	I
Vibration	514.6	I
Shock	516.6	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

Ingress Protection Standard	
Dust & Water	IP67 (Dust-tight and waterproof protection)

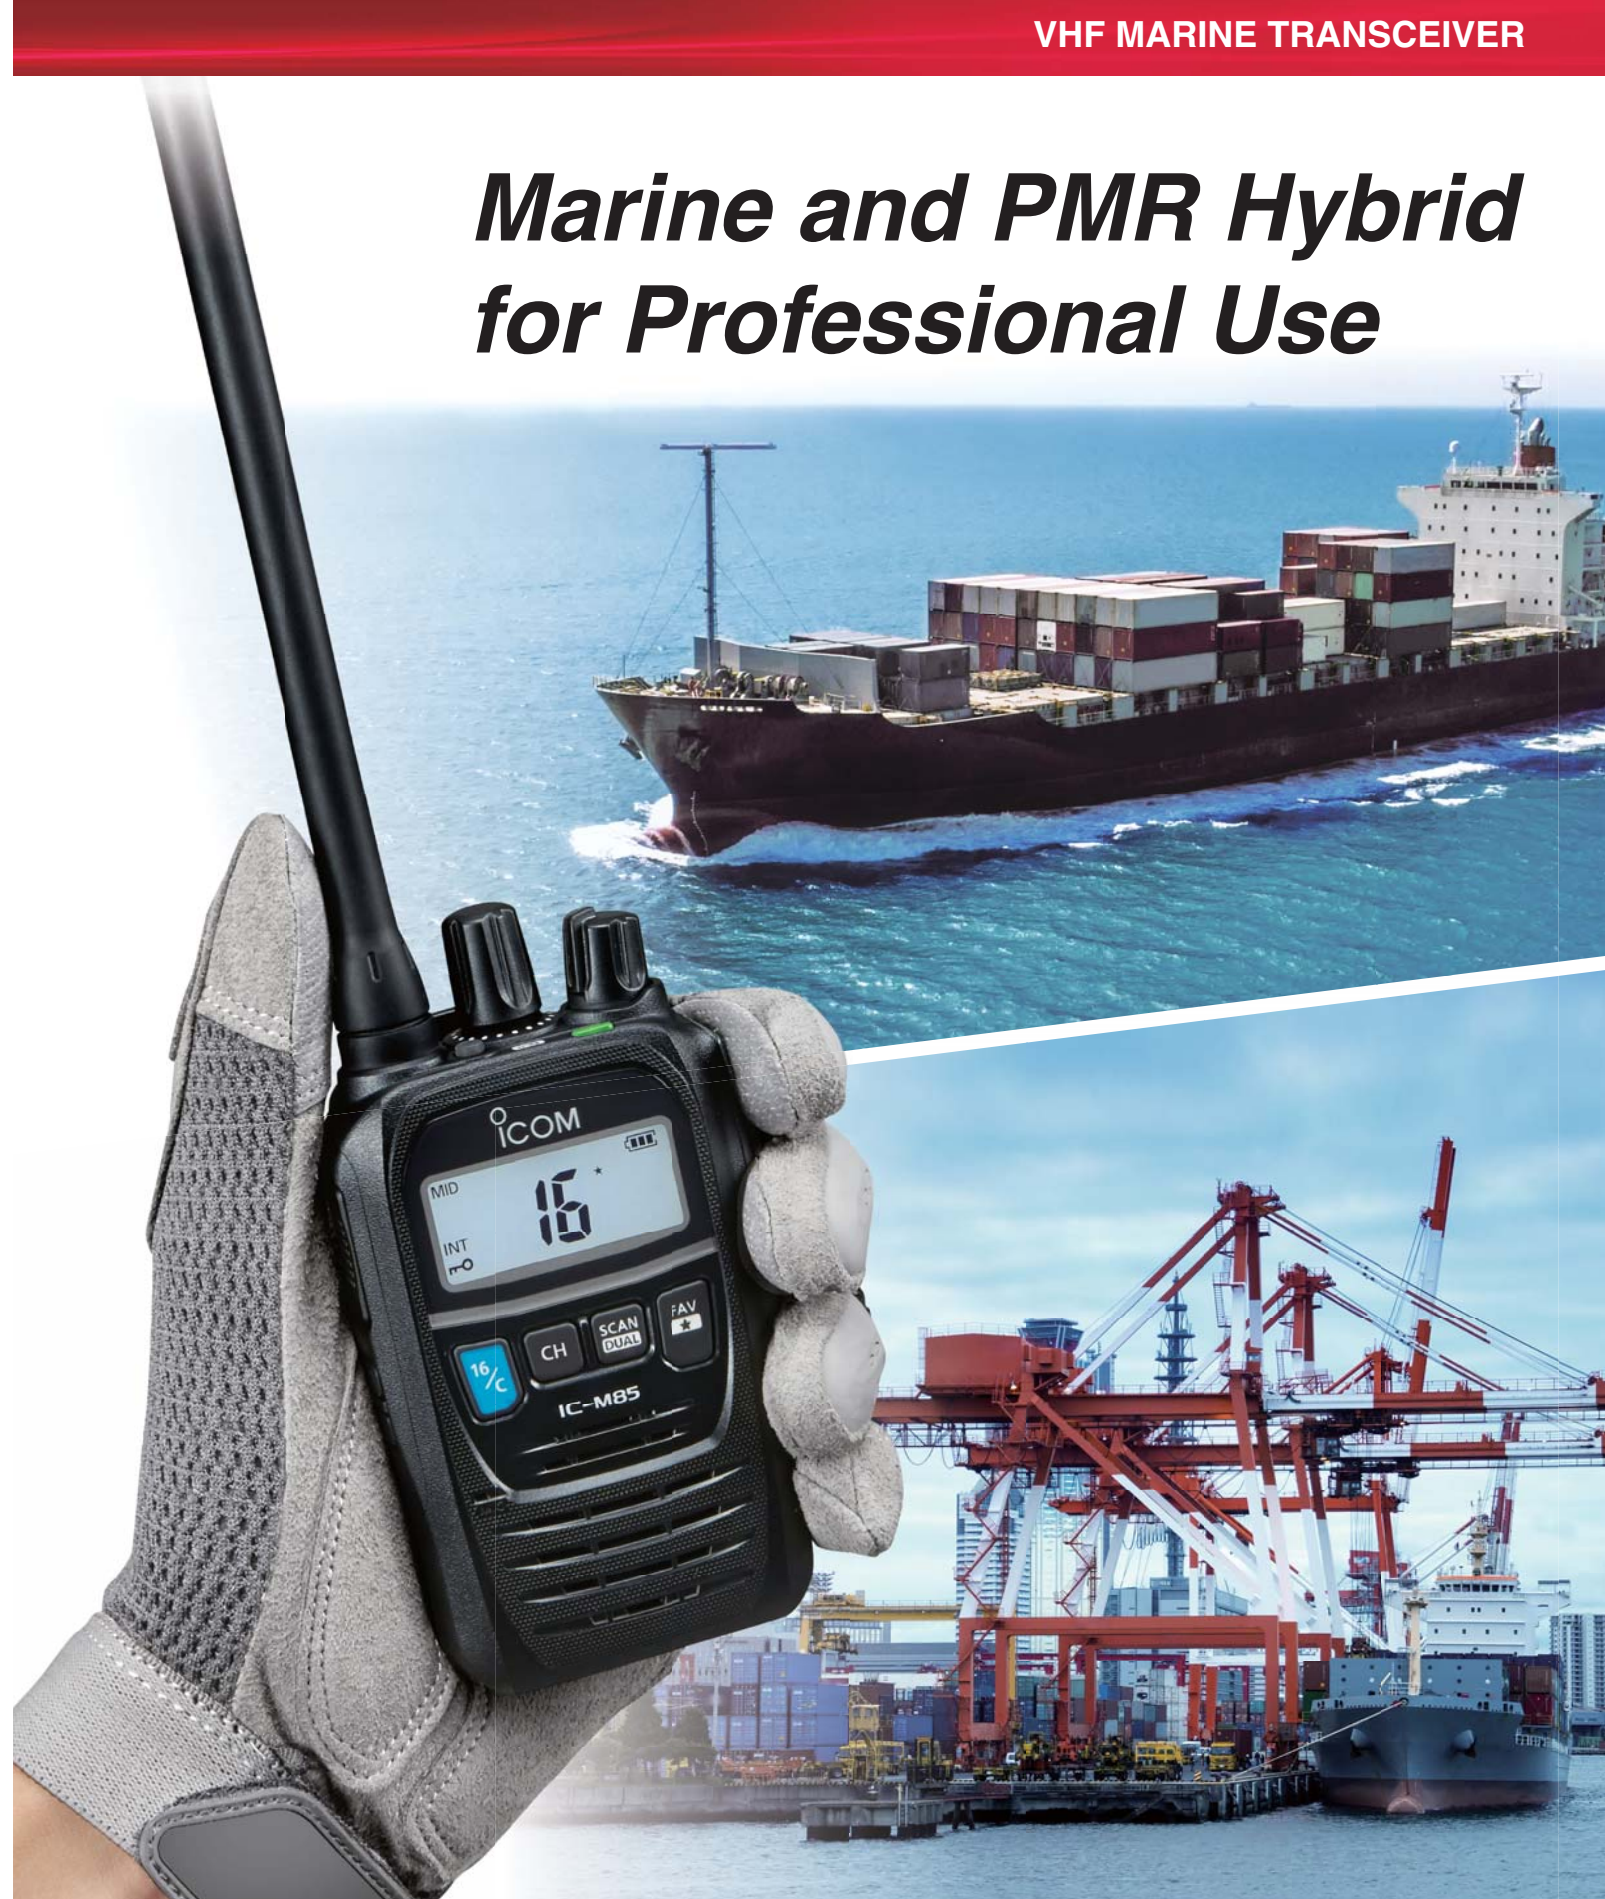

Marine and PMR Hybrid for Professional Use